


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:225.0V I:0.1410A P:30.60W PF:0.9610 Freq:0Hz Lamp Flux:1889.18x1 lm					
NAME: ALST85-32G30-F		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:76		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 61.74 lm/W
MODEL	3000K CRI90	I _{max} (cd)	4932	S/MH(C0/180)	0.56	
NOMINAL POWER(W)	32	LOR(%)	100.0	S/MH(C90/270)	0.56	
RATED VOLTAGE(V)	220-240	TOTAL FLUX(lm)	1889.2	η UP,DN(C0-180)	0.0,48.1	
NOMINAL FLUX(lm)	1889.18	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,51.9	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	230	η down(%)	100.0	CIBSE SHR MAX	0.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

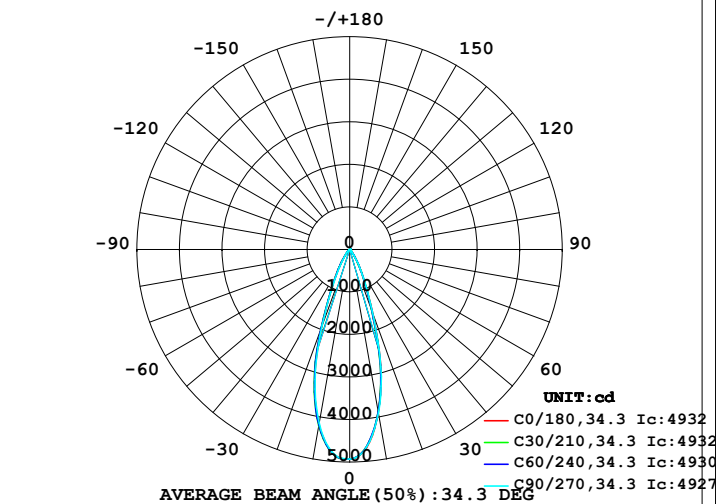

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

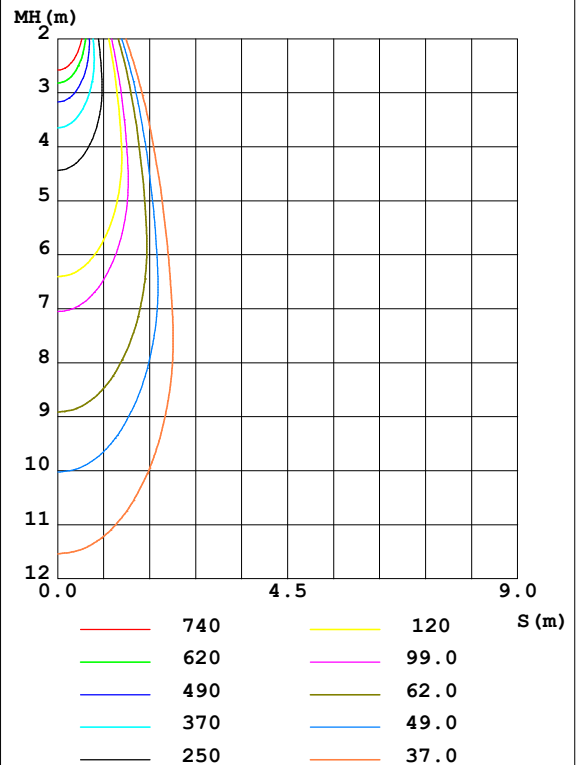

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3895	3896	3898	4042	4172	4171	4147	4002	0- 10	428.2	428.2	22.7,22.7
20	1567	1544	1565	1742	1919	1924	1893	1698	10- 20	801.4	1230	65.1,65.1
30	423.2	431.4	440.2	502.5	551.5	539.9	515.6	451.6	20- 30	434.4	1664	88.1,88.1
40	110.9	101.9	101.1	112.3	128.0	133.2	132.6	118.6	30- 40	156.5	1820	96.4,96.4
50	25.76	25.66	26.11	27.68	30.98	30.90	31.35	26.63	40- 50	46.91	1867	98.8,98.8
60	6.100	5.736	5.934	6.427	7.447	7.265	7.668	6.347	50- 60	13.90	1881	99.6,99.6
70	3.122	2.730	2.732	2.850	3.647	3.363	3.675	3.148	60- 70	4.605	1886	99.8,99.8
80	1.129	1.127	1.105	1.096	1.102	1.187	1.160	1.050	70- 80	2.144	1888	99.9,99.9
90	1.558	1.569	1.558	1.495	0.8808	0.8805	0.8845	0.9156	80- 90	1.201	1889	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1851.3 lm

%lum = 98.0%

%lamp = 98.0%

Conical surface Flux(120deg): 1881.2 lm

%lum = 99.6%


%lamp = 99.6%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:225.0V I:0.1410A P:30.60W PF:0.9610 Freq:0Hz Lamp Flux:1889.18x1 lm		
NAME: ALST85-32G30-F	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:76	Shielding Angle:

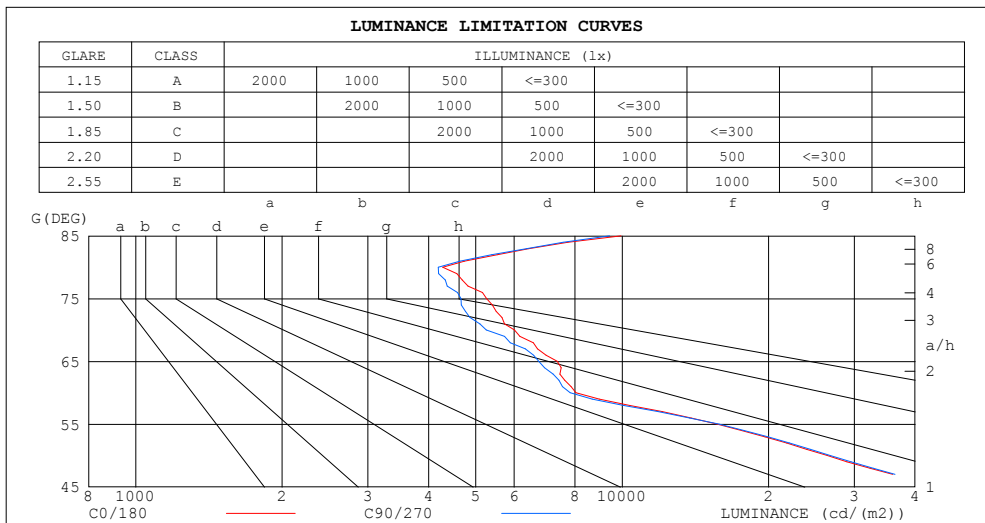

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	9953	9425
80	4281	4188
75	5261	4662
70	6008	5258
65	7362	6735
60	8029	7812
55	15666	15805
50	26371	26742
45	46305	45313


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:225.0V I:0.1410A P:30.60W PF:0.9610 Freq:0Hz Lamp Flux:1889.18x1 lm		
NAME: ALST85-32G30-F	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:76	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.00	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.91	.89	.92	.90	.88	.87
4.0	.95	.91	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.86	.84	.83
5.0	.91	.86	.83	.90	.86	.82	.88	.85	.82	.87	.83	.81	.85	.82	.80	.79
6.0	.87	.82	.79	.86	.82	.78	.85	.81	.78	.83	.80	.77	.82	.79	.77	.76
7.0	.83	.78	.75	.83	.78	.75	.81	.77	.74	.80	.77	.74	.79	.76	.74	.72
8.0	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.74	.71	.77	.73	.71	.70
9.0	.77	.72	.69	.76	.72	.69	.75	.71	.68	.75	.71	.68	.74	.70	.68	.67
10.0	.74	.69	.66	.73	.69	.66	.73	.69	.66	.72	.68	.66	.71	.68	.65	.64

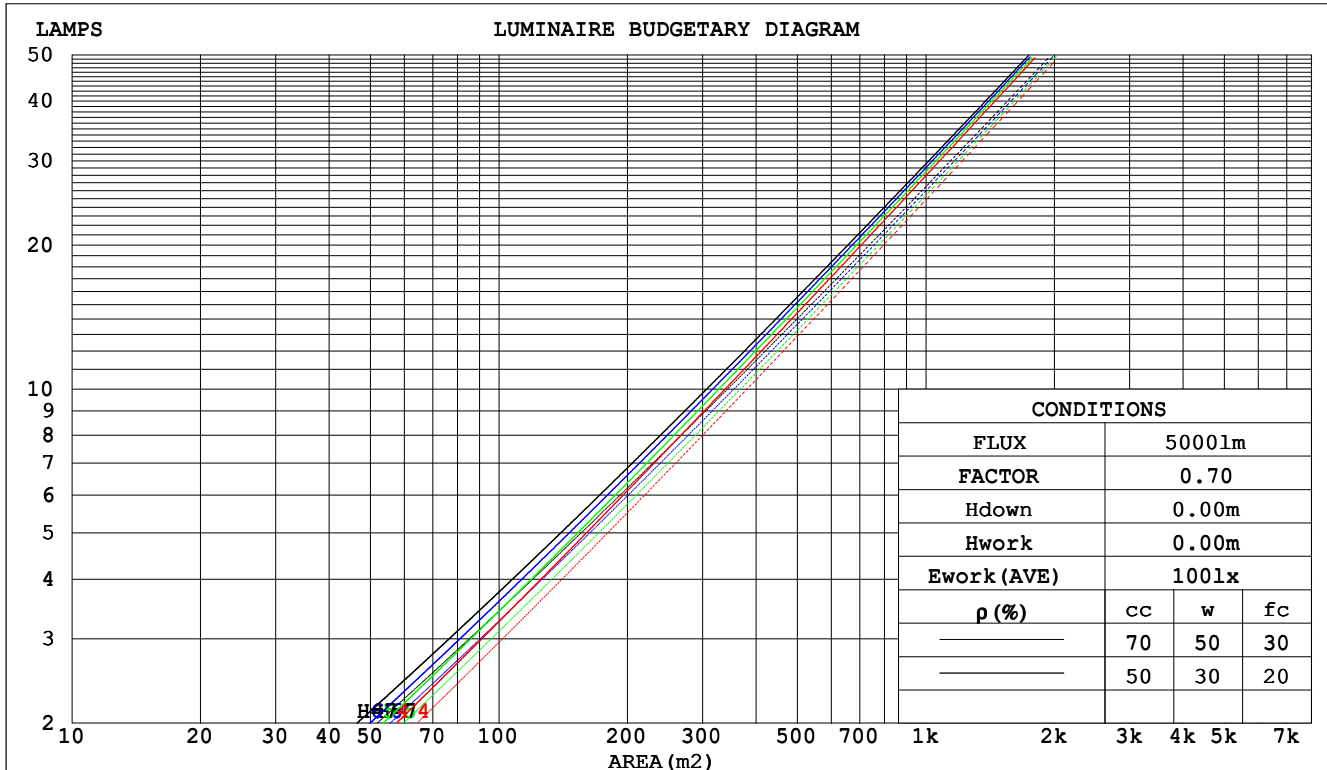

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:AE
 Test Date:2020-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:225.0V I:0.1410A P:30.60W PF:0.9610 Freq:0Hz Lamp Flux:1889.18x1 lm					
NAME: ALST85-32G30-F			TYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.:			SUR.:76		Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.154	.087	.028	.147	.084	.027	.135	.077	.025	.123	.071	.023	.113	.065	.021	
2.0	.144	.079	.024	.139	.077	.024	.129	.071	.022	.119	.067	.021	.110	.062	.020	
3.0	.136	.072	.022	.131	.070	.021	.123	.066	.020	.114	.063	.019	.107	.059	.018	
4.0	.128	.067	.020	.124	.065	.019	.117	.062	.019	.110	.059	.018	.104	.056	.017	
5.0	.122	.062	.018	.118	.061	.018	.112	.058	.017	.106	.056	.017	.100	.054	.016	
6.0	.116	.058	.017	.113	.057	.016	.107	.055	.016	.102	.053	.016	.097	.051	.015	
7.0	.110	.055	.015	.108	.054	.015	.103	.052	.015	.098	.050	.015	.094	.049	.014	
8.0	.105	.052	.014	.103	.051	.014	.099	.049	.014	.095	.048	.014	.091	.047	.014	
9.0	.101	.049	.014	.099	.048	.014	.095	.047	.013	.091	.046	.013	.088	.045	.013	
10.0	.097	.046	.013	.095	.046	.013	.092	.045	.013	.088	.044	.012	.085	.043	.012	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011	
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.117	.086	.063	.101	.075	.055	.069	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.109	.077	.053	.094	.066	.046	.065	.046	.033	.038	.027	.019	.012	.009	.006	
7.0	.102	.069	.045	.088	.060	.039	.061	.042	.028	.035	.025	.017	.011	.008	.006	
8.0	.096	.062	.039	.083	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005	
9.0	.090	.057	.034	.078	.049	.030	.054	.035	.021	.031	.020	.012	.010	.007	.004	
10.0	.086	.052	.030	.074	.045	.026	.051	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:225.0V I:0.1410A P:30.60W PF:0.9610 Freq:0Hz Lamp Flux:1889.18x1 lm											
NAME: ALST85-32G30-F						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.:						SUR.:76		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		16.2	16.9	16.4	17.1	17.3	16.1	16.8	16.3	17.0	17.1
	3H	16.1	16.8	16.3	17.0	17.2	16.0	16.7	16.2	16.9	17.0
	4H	16.0	16.7	16.3	16.9	17.1	15.9	16.6	16.2	16.8	17.0
	6H	15.9	16.6	16.2	16.8	17.1	15.8	16.5	16.1	16.7	16.9
	8H	15.9	16.5	16.2	16.8	17.0	15.8	16.4	16.1	16.7	16.9
	12H	15.9	16.5	16.2	16.8	17.0	15.8	16.4	16.1	16.6	16.9
4H	2H	16.0	16.6	16.2	16.9	17.1	15.9	16.5	16.1	16.8	17.0
	3H	15.9	16.5	16.2	16.7	17.0	15.8	16.3	16.1	16.6	16.9
	4H	15.8	16.4	16.2	16.7	17.0	15.7	16.2	16.0	16.5	16.8
	6H	15.8	16.2	16.1	16.6	16.9	15.6	16.1	16.0	16.4	16.8
	8H	15.7	16.2	16.1	16.5	16.9	15.6	16.0	16.0	16.4	16.8
	12H	15.7	16.1	16.1	16.5	16.9	15.6	16.0	16.0	16.4	16.8
8H	4H	15.7	16.1	16.1	16.5	16.8	15.6	16.0	16.0	16.4	16.7
	6H	15.6	16.0	16.1	16.4	16.8	15.5	15.9	15.9	16.3	16.7
	8H	15.6	15.9	16.1	16.4	16.8	15.5	15.8	15.9	16.2	16.7
	12H	15.7	15.9	16.1	16.4	16.8	15.5	15.8	16.0	16.2	16.7
12H	4H	15.6	16.0	16.0	16.4	16.8	15.5	15.9	15.9	16.3	16.7
	6H	15.6	15.9	16.0	16.3	16.8	15.5	15.8	15.9	16.2	16.6
	8H	15.6	15.9	16.0	16.3	16.8	15.5	15.7	15.9	16.2	16.6
Variations with the observer position at spacings:											
S = 1.0H	+ 3.0 / - 6.3					+ 2.8 / - 6.2					
1.5H	+ 4.8 / - 5.2					+ 4.6 / - 5.1					
2.0H	+ 4.7 / - 3.6					+ 4.6 / - 3.8					

CIE Pub.117, 1889 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.2$)

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:225.0V I:0.1410A P:30.60W PF:0.9610 Freq:0Hz Lamp Flux:1889.18x1 lm		
NAME: ALST85-32G30-F	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:76	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	80	89	83	80	88	83	79	76
0.80	96	91	87	96	91	87	95	90	87	83
1.00	101	95	92	100	95	92	98	95	91	87
1.25	104	99	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	102	105	102	100	95
2.50	111	107	104	109	106	104	106	104	102	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	112	110	112	110	108	109	107	105	98
5.00	115	113	112	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:225.0V I:0.1410A P:30.60W PF:0.9610 Freq:0Hz Lamp Flux:1889.18x1 lm		
NAME: ALST85-32G30-F	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:76	Shielding Angle:

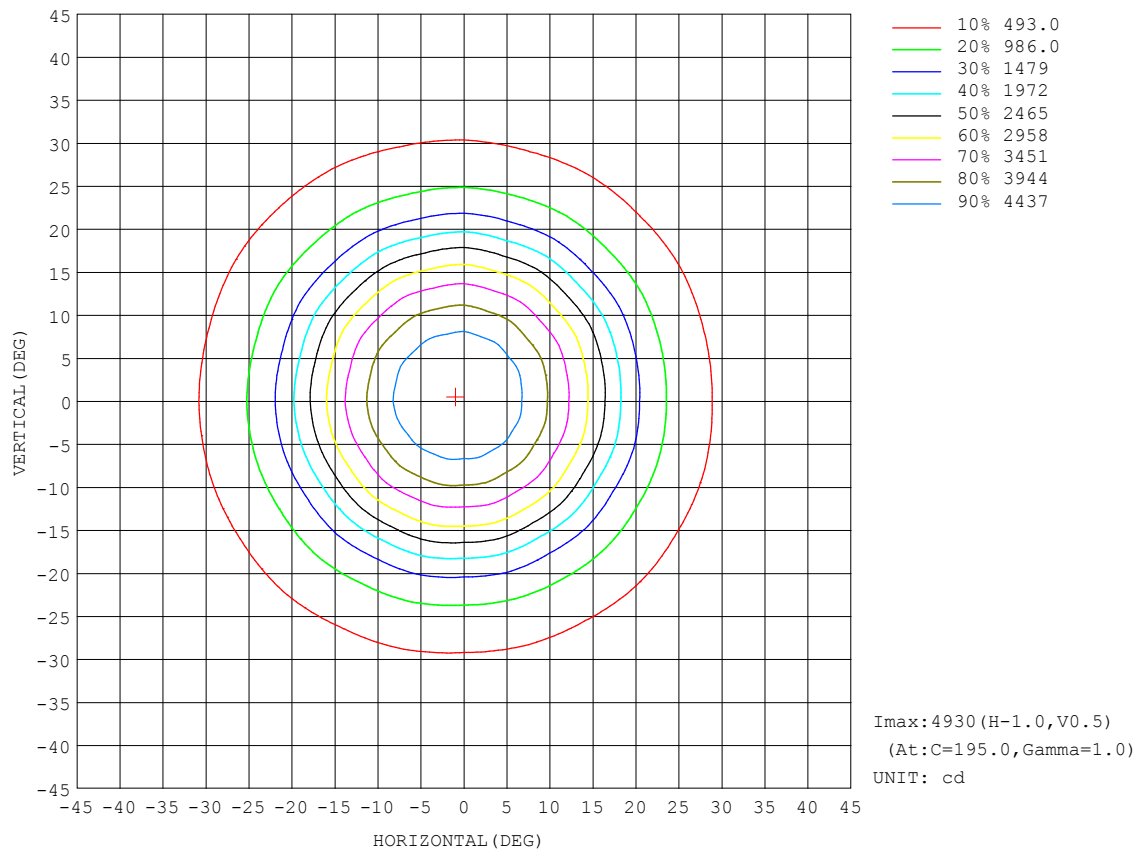


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

AAI Figure

Test:U:225.0V I:0.1410A P:30.60W PF:0.9610 Freq:0Hz Lamp Flux:1889.18x1 lm		
NAME: ALST85-32G30-F	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:76	Shielding Angle:

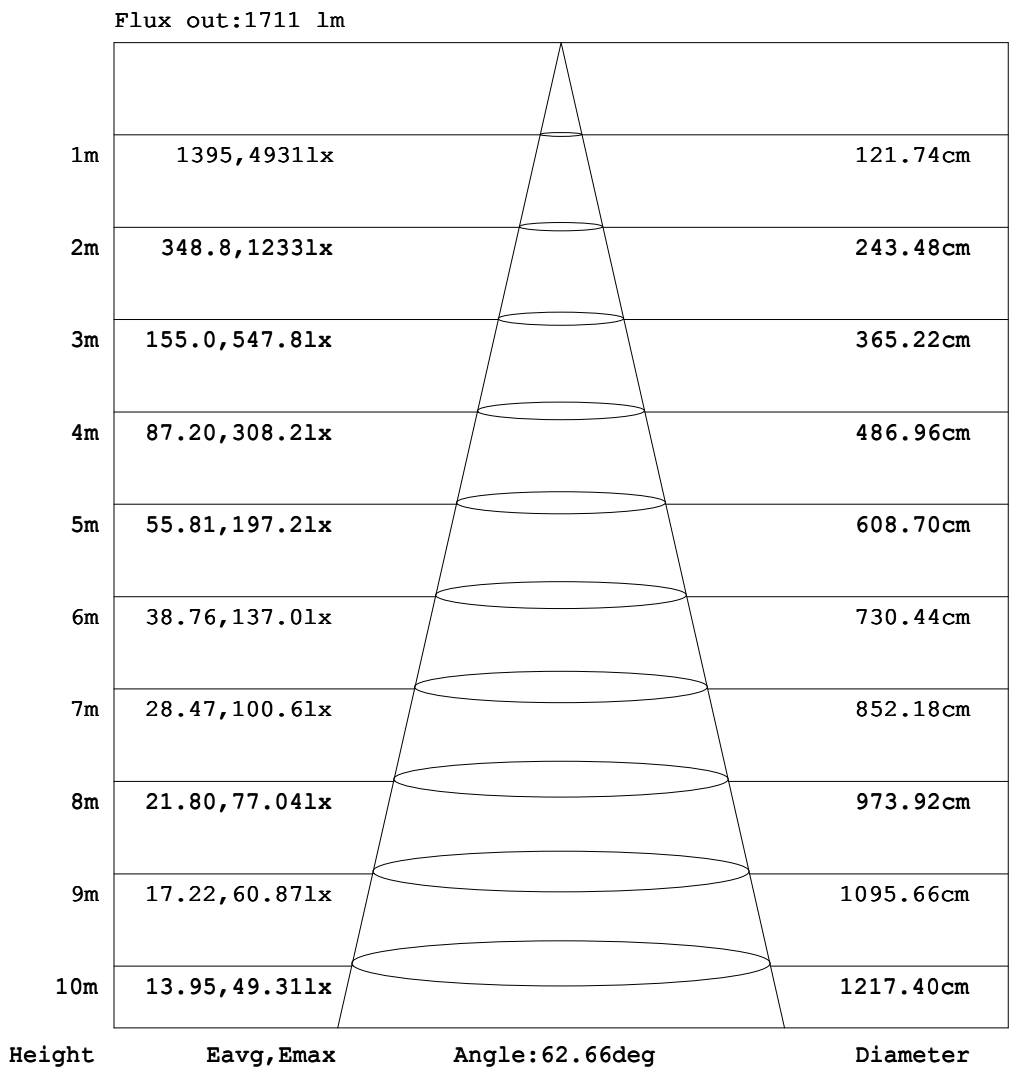


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: AE
 Test Date: 2020-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 7.240m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:225.0V I:0.1410A P:30.60W PF:0.9610 Freq:0Hz Lamp Flux:1889.18x1 lm		
NAME: ALST85-32G30-F	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:76	Shielding Angle:

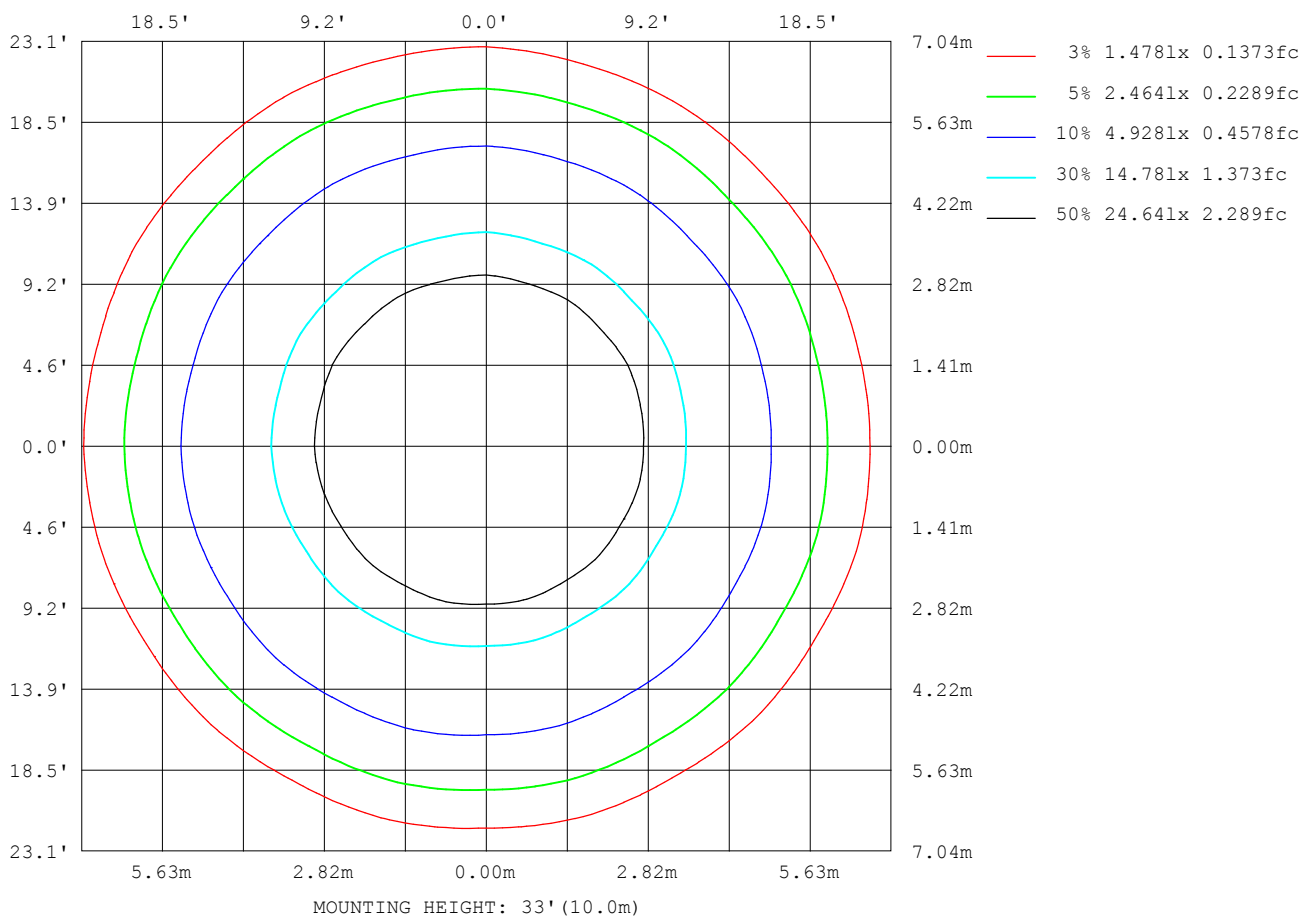

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-10-29

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:225.0V I:0.1410A P:30.60W PF:0.9610 Freq:0Hz Lamp Flux:1889.18x1 lm		
NAME: ALST85-32G30-F	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:76	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7666
L_0~180 (75) av	5233
L_0~180 (85) av	8275
L_90~270 (65) av	7302
L_90~270 (75) av	5066
L_90~270 (85) av	8092
L_45 (65) av	6854
L_45 (75) av	5022
L_45 (85) av	8160

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:AE
Test Date:2020-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

Planar Illuminance Curve

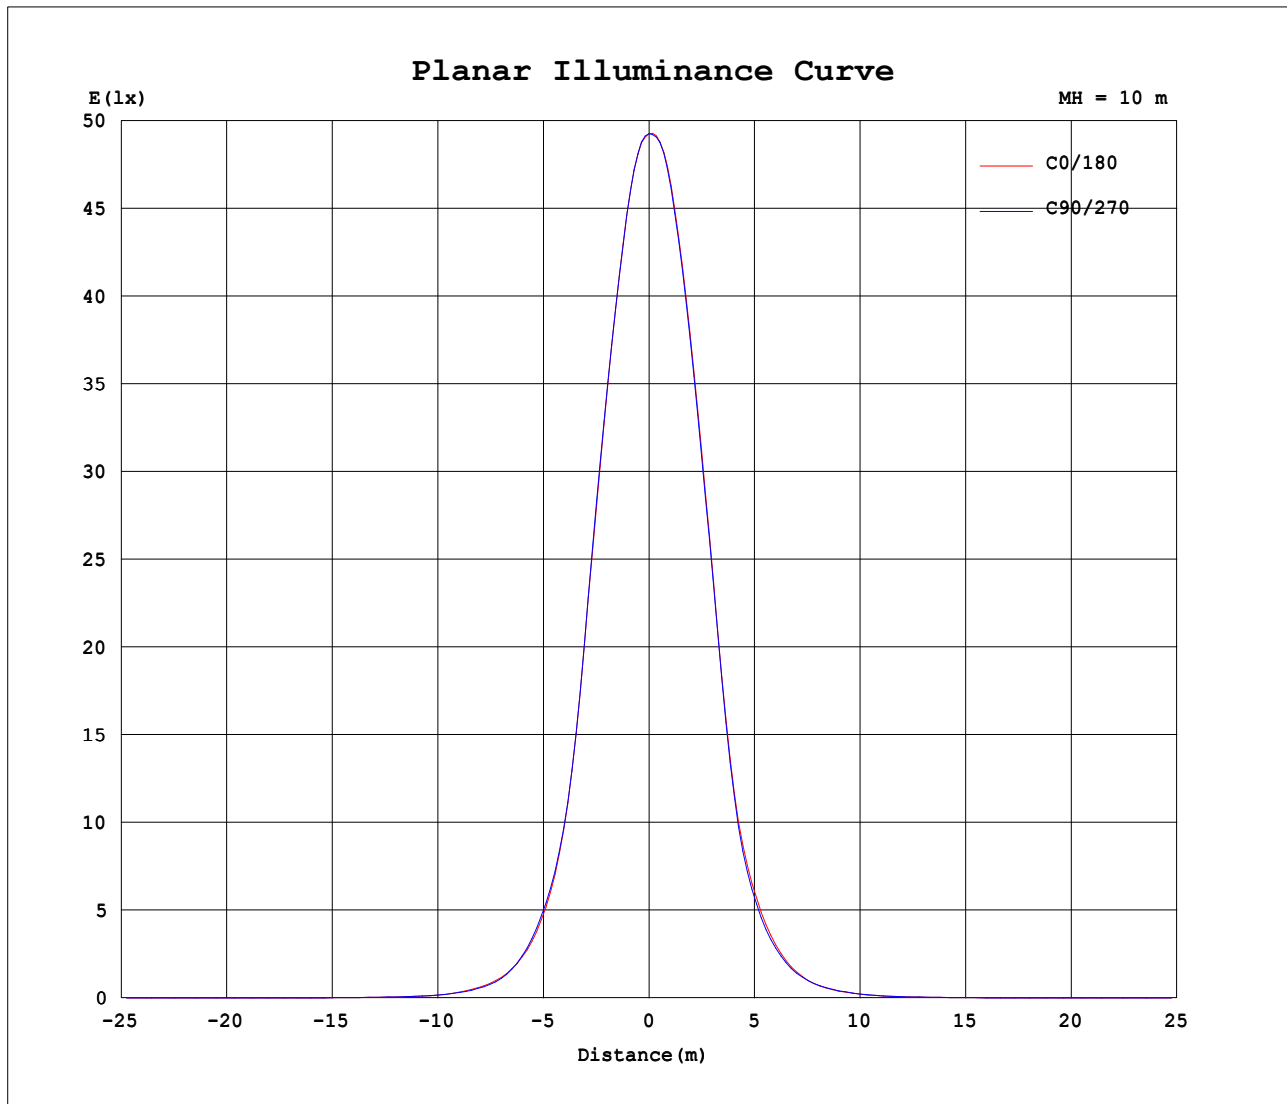

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: AE
Test Date: 2020-10-29

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity: 65.0%
Test Distance: 7.240m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
Humidity:65.0%
Test Distance:7.240m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:7.240m [K=1.0000]
 Remarks: