


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:224.8V I:0.1110A P:23.80W PF:0.9520 Freq:50.00Hz Lamp Flux:2048.54x1 lm					
NAME: DP125RW-WF03-24G40		TYPE:		WEIGHT:	
SPEC.:		DIM.:		SERIAL No.:	
MFR.:		SUR.:120		Shielding Angle:	

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 86.07 lm/W
MODEL	4000K CRI90	I _{max} (cd)	2585	S/MH(C0/180)	0.79	
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	0.82	
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2048.5	η UP,DN(C0-180)	0.0,49.6	
NOMINAL FLUX(lm)	2048.54	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.4	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	36	η down(%)	100.0	CIBSE SHR MAX	0.85	

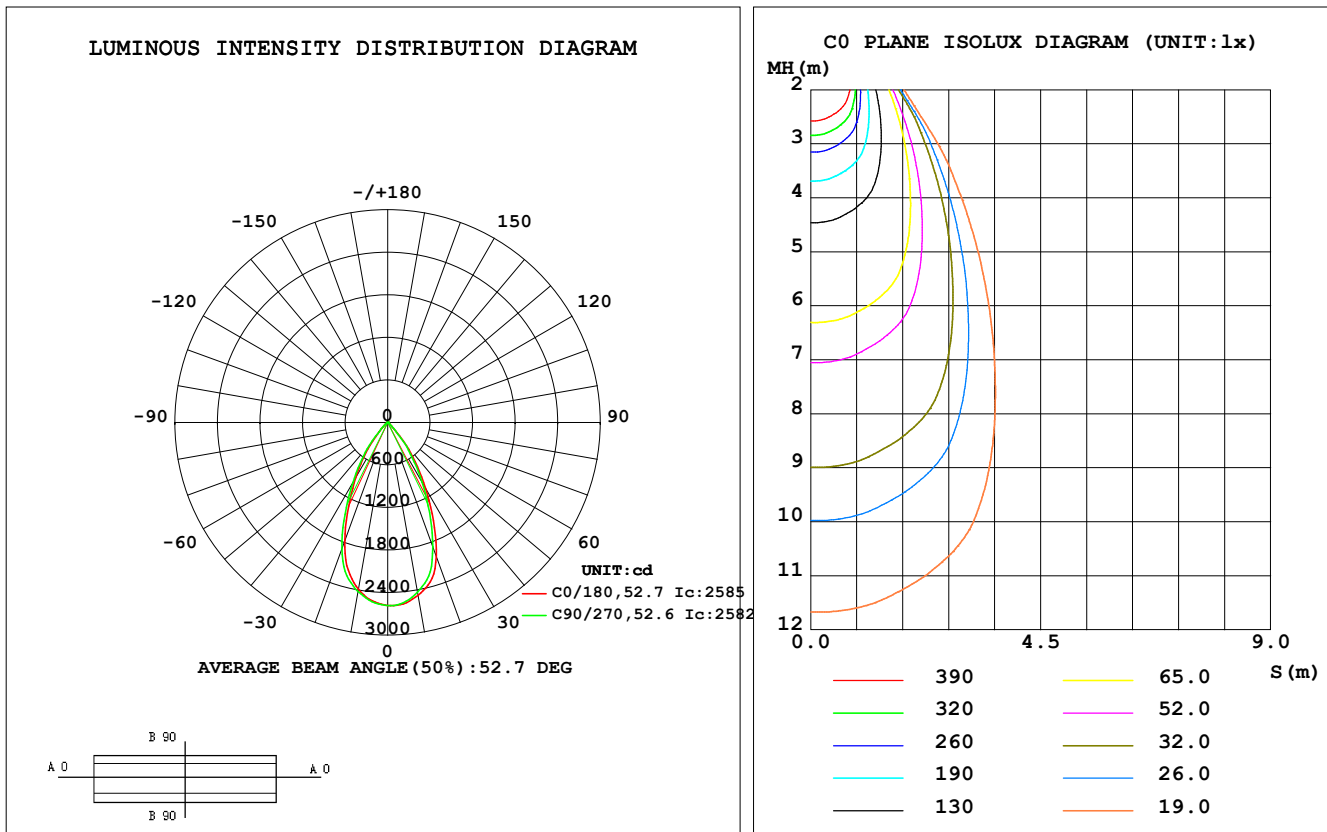

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-07-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2474	2459	2432	2396	2389	2376	2420	2473	0- 10	239.2	239.2	11.7,11.7
20	2005	1962	1866	1788	1775	1794	1888	2014	10- 20	618.8	858.0	41.9,41.9
30	1070	1047	972.6	915.7	904.4	929.7	991.3	1079	20- 30	647.6	1506	73.5,73.5
40	346.7	337.3	298.4	263.3	262.0	283.4	338.3	386.7	30- 40	395.8	1901	92.8,92.8
50	50.48	47.34	44.03	41.18	57.73	62.40	67.52	68.48	40- 50	106.0	2007	98,98
60	4.224	3.684	3.660	3.461	14.52	14.62	15.23	16.01	50- 60	21.69	2029	99.1,99.1
70	2.756	2.764	2.789	2.814	10.43	10.51	10.74	11.03	60- 70	7.794	2037	99.4,99.4
80	2.771	2.759	2.759	2.845	7.633	7.647	7.762	8.016	70- 80	6.297	2043	99.7,99.7
90	3.439	3.449	3.537	3.616	5.774	5.770	5.898	5.986	80- 90	5.364	2049	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1973.4 lm

%lum = 96.3%

%lamp = 96.3%

Conical surface Flux(120deg): 2029.1 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ZR
 Test Date:2021-07-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.402m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:224.8V I:0.1110A P:23.80W PF:0.9520 Freq:50.00Hz Lamp Flux:2048.54x1 lm		
NAME: DP125RW-WF03-24G40	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:

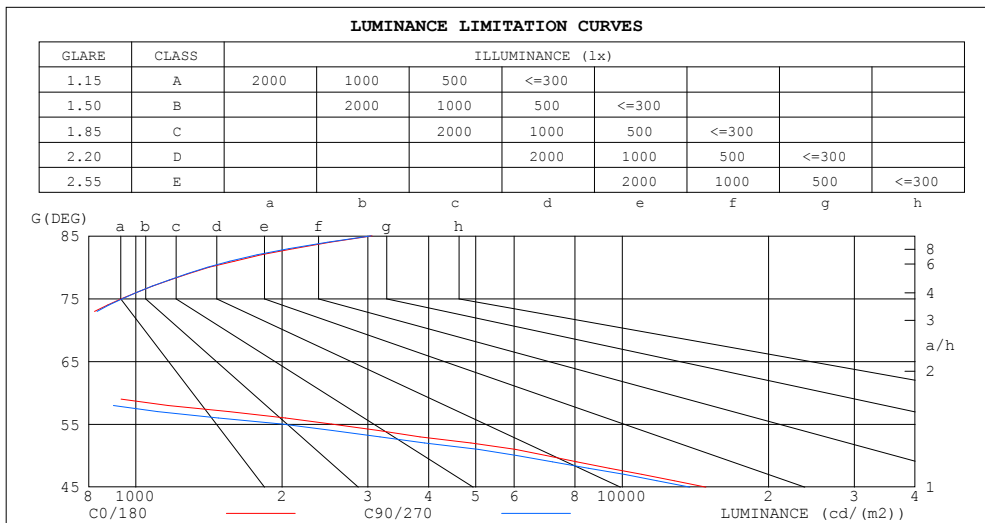


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: ZR
Test Date: 2021-07-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity: 65.0%
Test Distance: 8.402m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:224.8V I:0.1110A P:23.80W PF:0.9520 Freq:50.00Hz Lamp Flux:2048.54x1 lm		
NAME: DP125RW-WF03-24G40	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.09	1.06	1.04	1.05	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.96	1.01	.98	.95	.98	.95	.93	.95	.93	.91	.93	.91	.89	.87
3.0	.96	.91	.88	.95	.91	.87	.92	.89	.85	.90	.87	.84	.88	.85	.83	.81
4.0	.90	.85	.81	.89	.84	.80	.87	.83	.79	.85	.81	.78	.83	.80	.77	.76
5.0	.85	.79	.75	.84	.78	.74	.82	.77	.74	.80	.76	.73	.79	.75	.73	.71
6.0	.80	.74	.70	.79	.73	.69	.77	.73	.69	.76	.72	.68	.75	.71	.68	.67
7.0	.75	.69	.65	.74	.69	.65	.73	.68	.65	.72	.68	.64	.71	.67	.64	.63
8.0	.71	.65	.61	.70	.65	.61	.69	.64	.61	.68	.64	.60	.67	.63	.60	.59
9.0	.67	.61	.57	.67	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.55
10.0	.64	.58	.54	.63	.58	.54	.62	.57	.54	.62	.57	.54	.61	.57	.54	.52

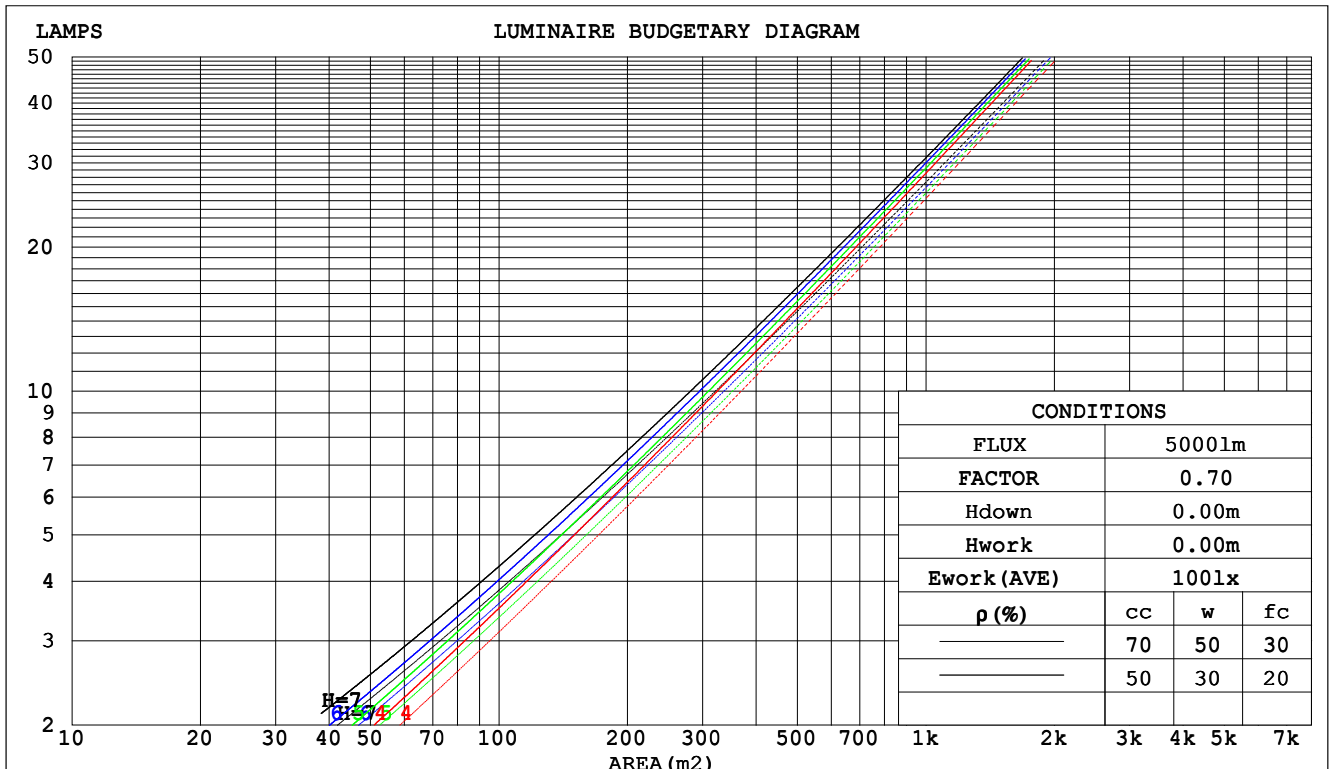

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-07-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:224.8V I:0.1110A P:23.80W PF:0.9520 Freq:50.00Hz Lamp Flux:2048.54x1 lm								
NAME: DP125RW-WF03-24G40				TYPE:			WEIGHT:	
SPEC.:				DIM.:			SERIAL No.:	
MFR.:				SUR.:120			Shielding Angle:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.178	.101	.032	.172	.098	.031	.159	.091	.029	.147	.085	.027	.137	.079	.026	
2.0	.169	.093	.028	.164	.090	.028	.153	.085	.026	.143	.080	.025	.134	.076	.024	
3.0	.161	.086	.026	.156	.084	.025	.147	.080	.024	.139	.076	.023	.131	.072	.022	
4.0	.153	.079	.023	.149	.078	.023	.141	.075	.022	.134	.072	.022	.127	.069	.021	
5.0	.146	.074	.021	.142	.073	.021	.135	.070	.021	.129	.068	.020	.123	.066	.020	
6.0	.139	.070	.020	.136	.069	.020	.130	.066	.019	.124	.065	.019	.119	.063	.019	
7.0	.133	.066	.019	.130	.065	.018	.125	.063	.018	.120	.061	.018	.115	.060	.018	
8.0	.127	.062	.017	.124	.061	.017	.120	.060	.017	.115	.058	.017	.111	.057	.017	
9.0	.122	.059	.016	.119	.058	.016	.115	.057	.016	.111	.056	.016	.107	.055	.016	
10.0	.117	.056	.016	.115	.055	.015	.111	.054	.015	.107	.053	.015	.104	.052	.015	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.156	.133	.113	.134	.114	.098	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.143	.114	.090	.123	.098	.078	.084	.068	.055	.049	.040	.032	.016	.013	.011	
4.0	.133	.099	.073	.114	.085	.063	.079	.060	.044	.045	.035	.026	.015	.011	.009	
5.0	.124	.087	.060	.107	.075	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007	
6.0	.117	.078	.050	.100	.067	.043	.069	.047	.031	.040	.028	.018	.013	.009	.006	
7.0	.110	.070	.042	.095	.061	.037	.066	.043	.026	.038	.025	.016	.012	.008	.005	
8.0	.105	.064	.036	.090	.056	.032	.062	.039	.022	.036	.023	.013	.012	.008	.004	
9.0	.100	.059	.031	.086	.051	.027	.059	.036	.019	.035	.021	.012	.011	.007	.004	
10.0	.095	.055	.028	.082	.047	.024	.057	.033	.017	.033	.020	.010	.011	.006	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-07-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:224.8V I:0.1110A P:23.80W PF:0.9520 Freq:50.00Hz Lamp Flux:2048.54x1 lm											
NAME: DP125RW-WF03-24G40						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.:						SUR.:120		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		15.8	16.8	16.1	16.9	17.1	15.3	16.3	15.6	16.5	16.6
	3H	15.7	16.5	15.9	16.7	16.9	15.2	16.0	15.4	16.2	16.4
	4H	15.6	16.4	15.9	16.6	16.8	15.1	15.9	15.4	16.1	16.4
	6H	15.5	16.3	15.8	16.5	16.8	15.0	15.8	15.3	16.0	16.3
	8H	15.5	16.2	15.8	16.5	16.7	15.0	15.7	15.3	16.0	16.2
	12H	15.5	16.2	15.8	16.4	16.7	15.0	15.7	15.3	15.9	16.2
4H	2H	15.6	16.4	15.9	16.6	16.8	15.1	15.9	15.4	16.1	16.4
	3H	15.4	16.1	15.7	16.4	16.7	14.9	15.6	15.2	15.9	16.2
	4H	15.3	16.0	15.7	16.3	16.6	14.8	15.5	15.2	15.8	16.1
	6H	15.2	15.8	15.6	16.1	16.5	14.8	15.3	15.1	15.7	16.0
	8H	15.2	15.7	15.6	16.1	16.5	14.7	15.3	15.1	15.6	16.0
	12H	15.2	15.7	15.6	16.1	16.4	14.7	15.2	15.1	15.6	16.0
8H	4H	15.2	15.7	15.6	16.1	16.4	14.7	15.2	15.1	15.6	15.9
	6H	15.1	15.5	15.5	15.9	16.3	14.6	15.1	15.1	15.5	15.9
	8H	15.1	15.5	15.5	15.9	16.3	14.6	15.0	15.1	15.4	15.9
	12H	15.1	15.4	15.6	15.9	16.3	14.6	15.0	15.1	15.4	15.9
12H	4H	15.1	15.6	15.5	16.0	16.4	14.7	15.1	15.1	15.5	15.9
	6H	15.1	15.4	15.5	15.9	16.3	14.6	15.0	15.0	15.4	15.8
	8H	15.1	15.4	15.5	15.8	16.3	14.6	14.9	15.0	15.3	15.8
Variations with the observer position at spacings:											
S = 1.0H	+ 3.2 / -11.6					+ 3.0 / -11.4					
1.5H	+ 5.5 / -10.7					+ 5.4 / -10.4					
2.0H	+ 6.1 / - 5.5					+ 6.1 / - 5.0					

CIE Pub.117, 2049 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 2.5$)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-07-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:224.8V I:0.1110A P:23.80W PF:0.9520 Freq:50.00Hz Lamp Flux:2048.54x1 lm		
NAME: DP125RW-WF03-24G40	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	87	81	77	87	80	77	86	80	77	73
0.80	95	89	85	94	88	85	93	88	84	81
1.00	99	93	90	98	93	90	97	93	89	85
1.25	103	98	94	102	97	94	100	96	93	89
1.50	106	101	98	105	100	97	102	99	96	92
2.00	108	104	101	107	103	100	104	101	99	94
2.50	110	106	103	109	105	102	105	103	101	95
3.00	112	108	106	110	107	104	107	104	102	96
4.00	114	111	109	112	109	107	108	106	105	97
5.00	115	113	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-07-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:224.8V I:0.1110A P:23.80W PF:0.9520 Freq:50.00Hz Lamp Flux:2048.54x1 lm		
NAME: DP125RW-WF03-24G40	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:

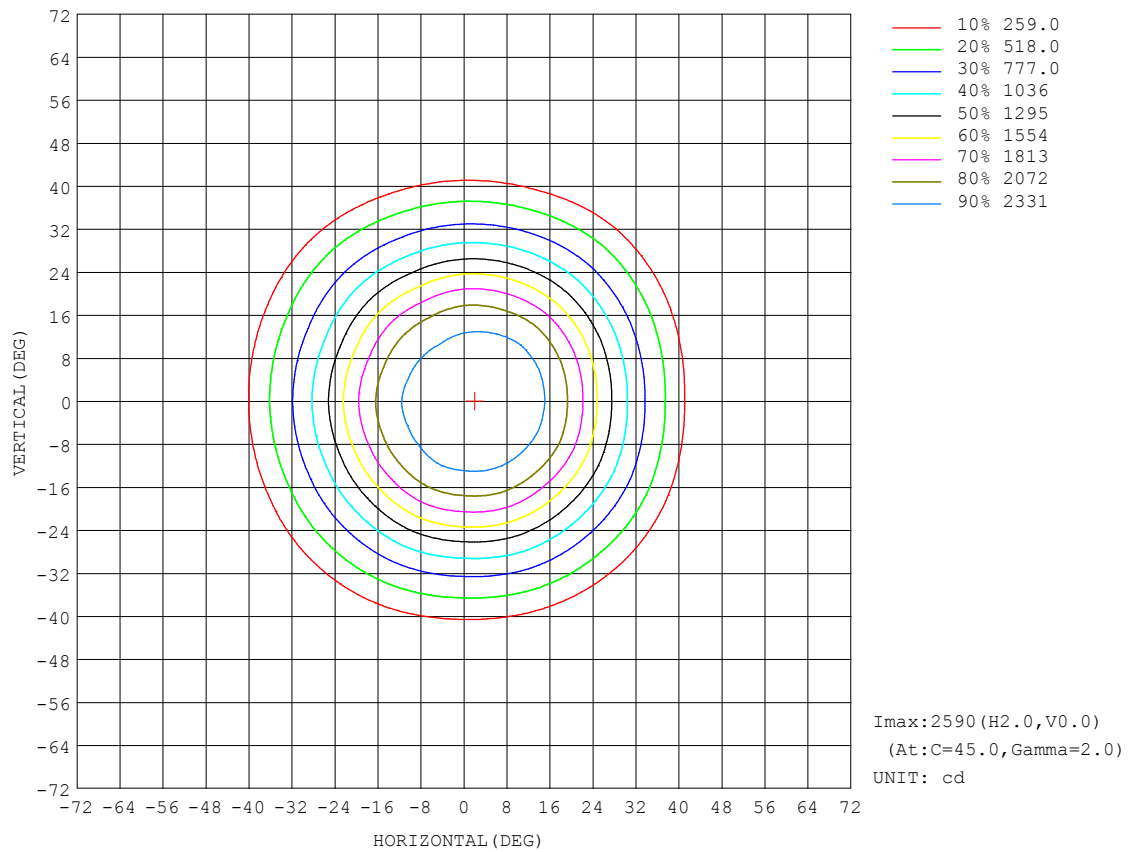


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-07-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

AAI Figure

Test:U:224.8V I:0.1110A P:23.80W PF:0.9520 Freq:50.00Hz Lamp Flux:2048.54x1 lm		
NAME: DP125RW-WF03-24G40	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:

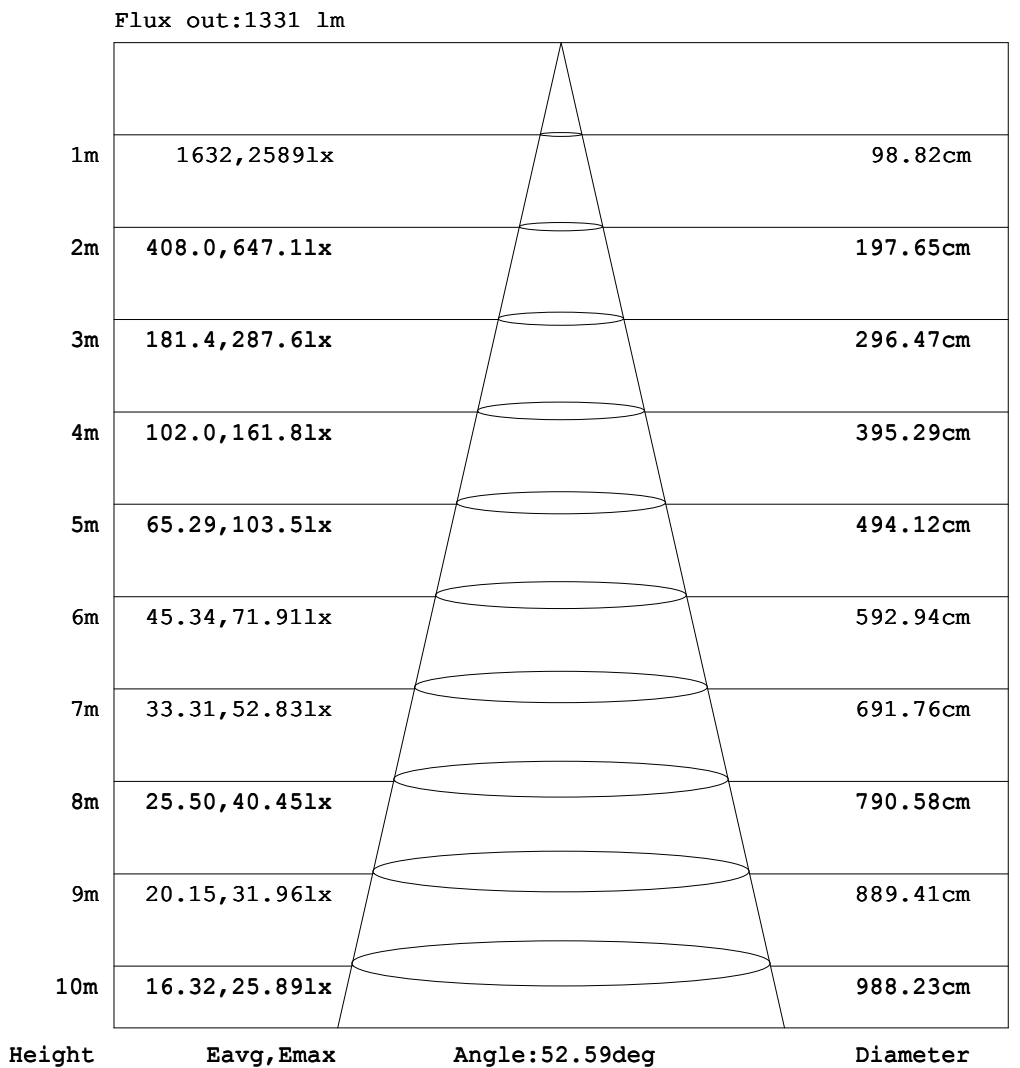


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-07-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:224.8V I:0.1110A P:23.80W PF:0.9520 Freq:50.00Hz Lamp Flux:2048.54x1 lm		
NAME: DP125RW-WF03-24G40	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:

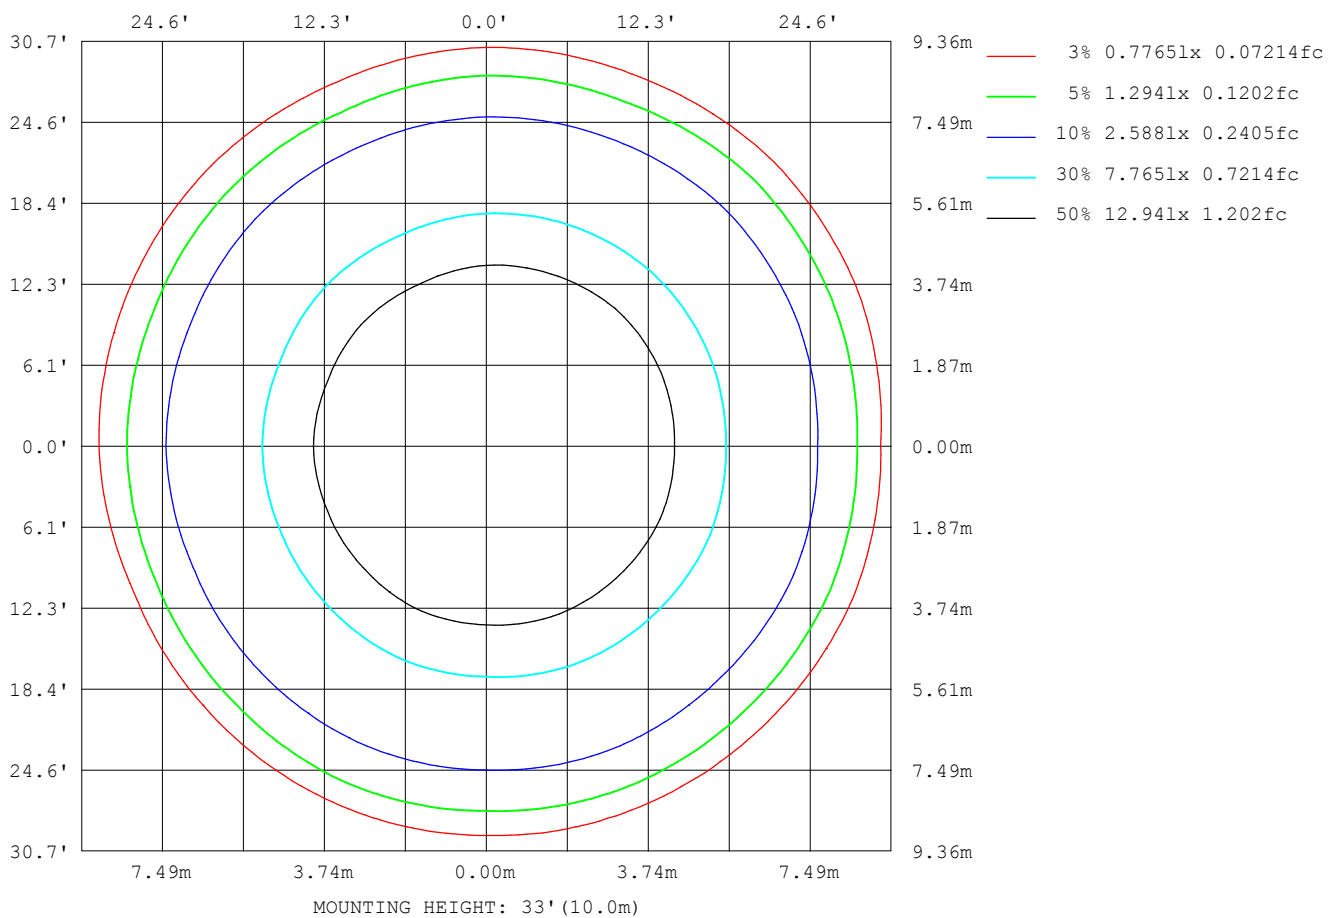

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:ZR
Test Date:2021-07-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:224.8V I:0.1110A P:23.80W PF:0.9520 Freq:50.00Hz Lamp Flux:2048.54x1 lm		
NAME: DP125RW-WF03-24G40	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:120	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1603
L_0~180 (75) av	1984
L_0~180 (85) av	4858
L_90~270 (65) av	1641
L_90~270 (75) av	2025
L_90~270 (85) av	4894
L_45 (65) av	1646
L_45 (75) av	2033
L_45 (85) av	4926

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:ZR
 Test Date:2021-07-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:65.0%
 Test Distance:8.402m [K=1.0000]
 Remarks:

Planar Illuminance Curve

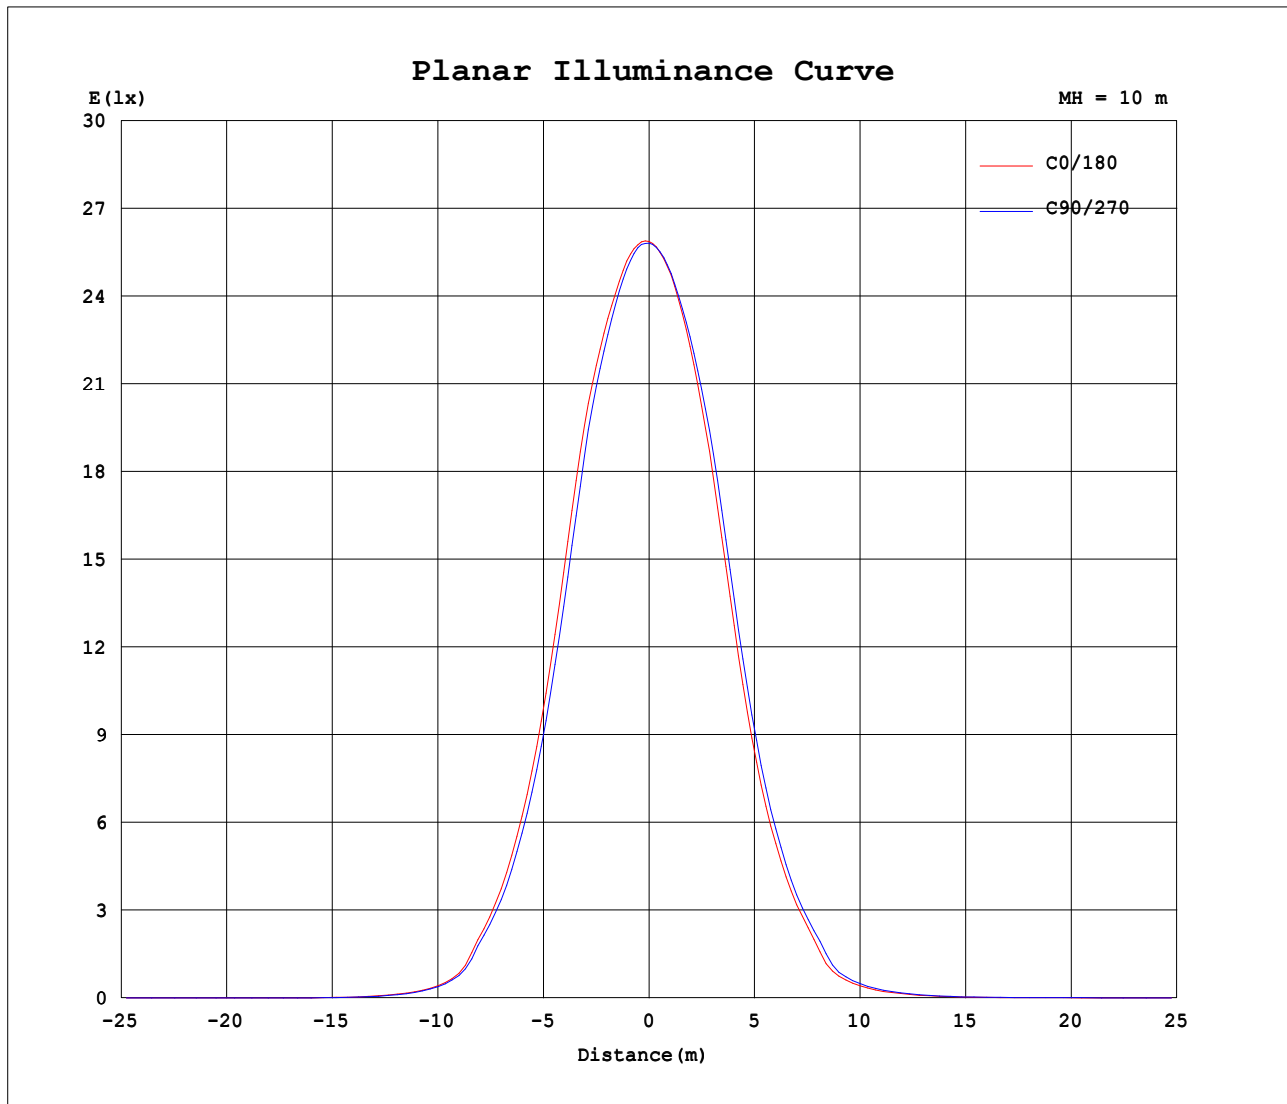

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: ZR
Test Date: 2021-07-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity: 65.0%
Test Distance: 8.402m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:65.0%
Test Distance:8.402m [K=1.0000]
Remarks:

```